

MAX BR1 M2M


Specialized Cellular Router for M2M Communications



MAX BR1 M2M 结构紧凑 (1.1 x 3.8 x 4.8 英寸)，坚固耐用，可以放在任何地方。它具有一个 9 针串行连接器，可实现简单且持久的 M2M 连接。此外，还可以使用 InControl 2 云管理对其进行远程监控和管理，从而节省服务行程。



InControl²
Setup.Manage.Report.



远程设备管理

通过 InControl 2 云管理平台远程管理 MAX BR1 M2M。可以为设备组安排自动固件更新等功能。

SpeedFusion 热故障转移

当主要广域网 (WAN) 连接失败时 MAX BR1 M2M 会自动在优先级较低的链路上重新建立 IPsec VPN 连接。您的 VPN 保持连接，您也能够无缝继续使用。

可安装于 DIN 轨



只需使用螺丝刀，您可以在几分钟内将 BR1 M2M 安装到任何 DIN 轨上。它可以快速且安全地部署在公用事业箱和其他位置。

MAX BR1 M2M

Specialized Cellular Router for M2M Communications

Specifications

BR1 M2M	
WAN Interface	1x 10/100M Ethernet Port 1x Embedded 4G Cellular Modem
LAN Interface	1x 10/100M Ethernet Port
Drop-in Mode	●
Antenna Connectors	2x SMA Cellular Antenna Connectors
Power Input	Device: Molex Micro-Fit 10V – 30V DC
Power Consumption	Max.: 10W, Typical: 8.5W, Min.: 6W
Dimensions	4.7 x 3.8 x 1.1 inches 120 x 97 x 26.5 mm (L x W x H)
Weight	0.8 pound 350 grams
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)
Warranty	1-Year Limited Warranty
Package Content	MAX BR1 M2M, 12V2A 4-Pin Power Supply (ACW-632), 1x Mounting Kit (ACW-736), 2x LTE Antennas (ACW-813)

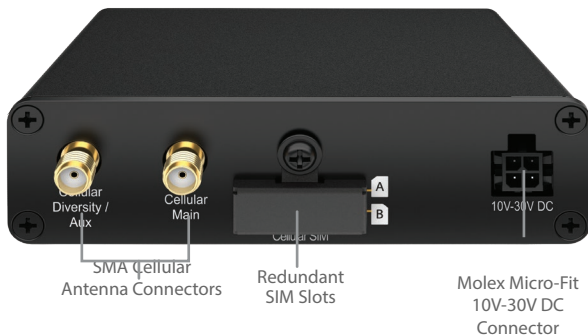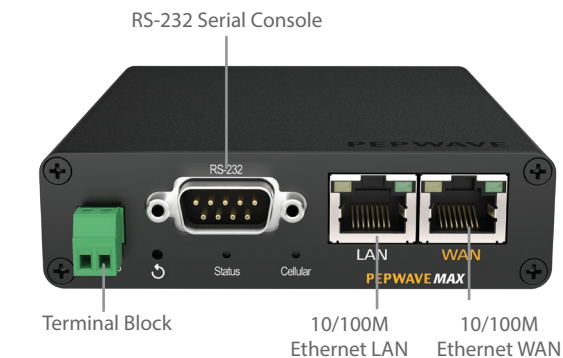

Ordering Information

Product Code	Carrier/Region	Embedded Modem	4G Bands	3G Bands
MAX-BR1-M2M-LTE-E-T	EMEA / APAC	1	4G LTE: B1, B3, B5, B7, B8, B20, B38 (TDD), B40(TDD), B41 (TDD)	WCDMA/HSPA+/DC-HSPA+: B1, B5, B8

Add-on Features

Product Code	Description
PVN-LC-05	Enables up to 5 PepVPN peers
MAX-BR1-ADV	Package includes a software license key for Advanced Car-Fi Roaming; and SpeedFusion and IPsec X.509 Certificate Support