

# UBR

Affordable

Capable

Always Available



# Plus

750% faster

UBR Plus




UBR LTE

With a max speed of **900 Mbps** and at **7.5 times** the speed of the original UBR, the UBR Plus brings you an unbreakable connection to keep your network running smoothly.


## Sleek and Stealthy

UBR Plus采用低调而坚固的设计，即使在狭小的空间中也容易部署。

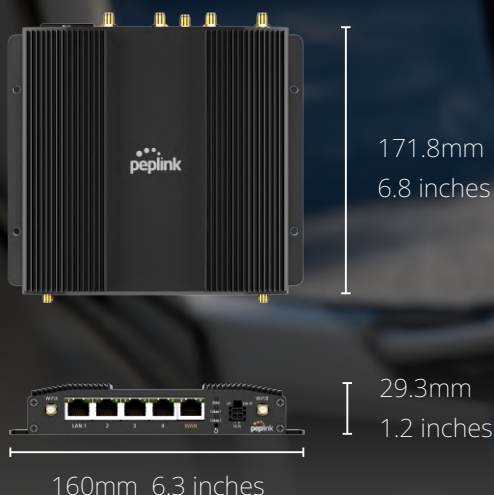

## SIM-pler than you think

更换部署中的物理SIM卡可能并不方便，但通过Peplink，这不再是一个麻烦。使用UBR Plus的内置eSIM，您可以随时更换运营商，或者连接其中一个SIM注入器，远程管理多达8个额外的SIM卡，覆盖范围可达100米！这种灵活性和便利性使得SIM卡管理变得简单而高效，无论您在何处都可以轻松切换运营商并远程管理多个SIM卡。无需手动更换物理SIM卡，节省时间和精力，提高部署的灵活性和可管理性。

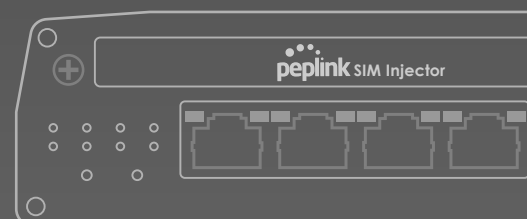

\* Feature will be available soon.

## Connectivity with **Reliability**

您就可以使用SpeedFusion Connect Protect<sup>^</sup>保护您的数据流，并充分利用SpeedFusion的网络增强功能。或者，通过我们的按需数据计划SpeedFusion Connect 5G/LTE，随时随地保持连接。这些功能让您能够轻松保护数据传输的安全性，并在任何地方都能享受高速连接的便利。




## Definitely **Tough Enough**

UBR Plus的坚固外壳使设备可靠耐用，就像它提供的连接一样。只需设置一次，然后无需再操心。这款设备具有出色的耐用性，能够在各种环境中提供稳定可靠的连接，让您无需担心连接中断或设备损坏的问题。只需简单设置一次，就能长期使用，让您可以专注于其他重要任务而无需额外关注设备的运行。



<sup>^</sup> Previously known as SpeedFusion Connect.



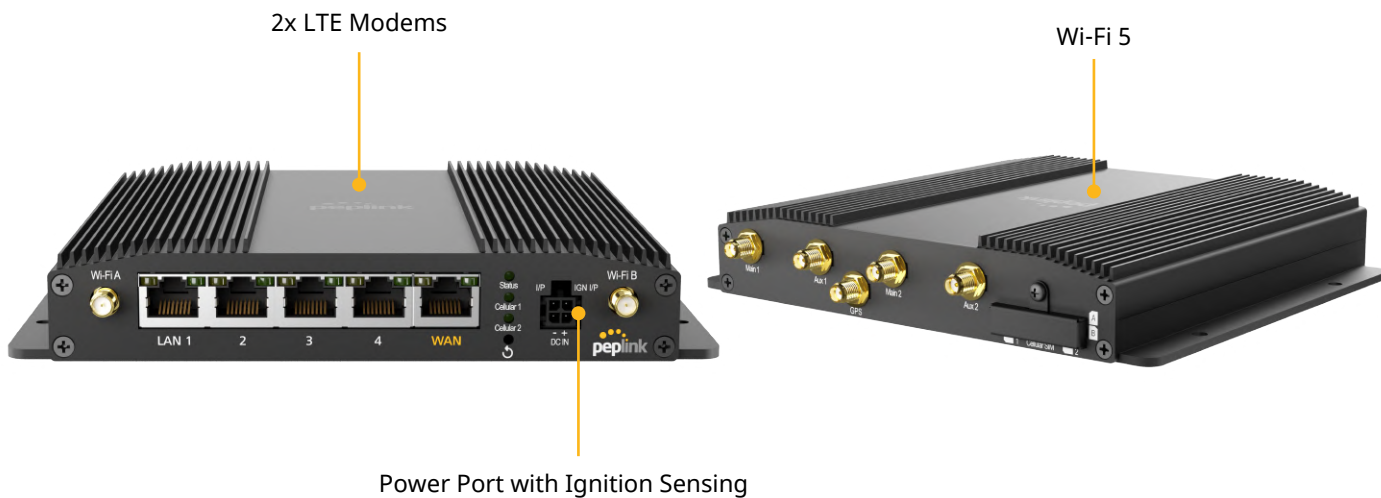

## Specifications

<b>WAN Interface</b>	1x 10/100/1000M Ethernet 2x Embedded Cellular Modems with Redundant SIM Slots	<b>Antenna Connectors</b>	4x SMA Cellular Antenna Connectors 2x RP-SMA Wi-Fi Antenna Connectors 1x SMA GPS Antenna Connector
<b>LAN Interface</b>	4x 10/100/1000M Ethernet	<b>Power Input</b>	10V – 30V DC
<b>Wi-Fi Interface</b>	Simultaneous Dual-Band (2.4GHz / 5GHz) Wi-Fi 5 2x2 MIMO Wi-Fi WAN and/or AP	<b>Power Consumption</b>	24W (max.)
<b>SpeedFusion Features</b>	Hot Failover <sup>1</sup> , WAN Smoothing <sup>1</sup> , Bandwidth Bonding <sup>1</sup>	<b>Dimensions</b>	6.8 x 6.5 x 1.2 inches / 171.8 x 160 x 29.3 mm
<b>Number of SpeedFusion VPN Peers</b>	2 / 5 <sup>2</sup>	<b>Weight</b>	1.59 pounds / 720 grams
<b>Features</b>	Ignition Sensing	<b>Operating Temperature</b>	-40° – 149°F / -40° – 65°C
<b>Router Throughput</b>	900 Mbps	<b>Humidity</b>	15% – 95% (non-condensing)
<b>SpeedFusion Throughput (No Encryption)</b>	100 Mbps	<b>Certifications <sup>5</sup></b>	FCC, CE, RoHS
<b>SpeedFusion Throughput (256-bit AES)</b>	60 Mbps	<b>Package Content</b>	1x UBR Plus 4x LTE Antennas (ACW-235) 2x Dual Band Wi-Fi Antennas (ACW-341) 1x GPS Active Antenna (ACW-232) 1x 12V 2A 4 Pin Power Supply (ACW-632)
<b>Recommended Users</b>	1-60	<b>SIM Card Size</b>	Nano-SIM (4FF)
<b>AP Controller</b>	Standard <sup>3</sup>	<b>Warranty</b>	1-Year Limited Warranty
<b>Maximum Number of AP Supported</b>	30 <sup>3</sup>		
<b>Cellular Data Rate <sup>4</sup> (Downlink / Uplink)</b>	CAT-7: 300 Mbps / 150 Mbps CAT-6: 300 Mbps / 50 Mbps		

<sup>1</sup> Requires a PrimeCare subscription, complimentary for the first year.

<sup>2</sup> 5 SpeedFusion VPN Peers are enabled for PrimeCare models which requires a PrimeCare subscription, complimentary for the first year.

<sup>3</sup> Will be supported in a future firmware upgrade.

<sup>4</sup> Maximum theoretical data rates.

<sup>5</sup> Certification pending.

Specifications are subject to change without notice.

## Ordering Information

### Product Code

UBR-PLUS-LTEA-US-T-PRM  
Embedded Modem(s):  
2x CAT-7

### Regions

Primary: North America  
  
\*US Carrier Certifications:  
AT&T, T-Mobile, Verizon, FirstNet

### LTE Bands

B2, B4, B5, B7, B12, B13, B14, B25, B26,  
B41, B42, B43, B48, B66, B71

### 3G Bands

HSPA+: B1, B5, B8

UBR-PLUS-LTEA-B-T-PRM  
Embedded Modem(s):  
2x CAT-6

Primary: APEC & EMEA

B1, B2, B3, B4, B5, B7, B8, B12, B13, B14,  
B17, B18, B19, B20, B25, B26, B28, B29,  
B30, B38, B39, B40, B41, B42, B43, B48,  
B66, B71

HSPA+/WCDMA: B1, B2, B4, B5, B6, B8,  
B9, B19

## Featured Add-on

### Product Code

PRM-UBR-PLUS-1Y

### Description

1-Year PrimeCare for UBR Plus

PRM-UBR-PLUS-2Y

2-Year PrimeCare for UBR Plus

PRM-UBR-PLUS-4Y

4-Year PrimeCare for UBR Plus

ANT-MB-42G-S-B-6

7-in-1 Cellular and Wi-Fi Antenna System with GPS Receiver (Black)

ANT-MB-42G-S-W-6

7-in-1 Cellular and Wi-Fi Antenna System with GPS Receiver (White)

ACW-634

10ft DC Power Cable